

CONTEMPORARY DRINKING FOUNTAINS

GU Series MODEL GUF99-FRU1 FREEZE RESISTANT, PEDESTAL

MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Freeze resistant valve system



MODEL: (Must Specify)

GUF98-FRU1 Tan Concrete Aggregate

GUF99-FRU1 Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)		
□ -CH30 □ -FS	Child height, 30" bubbler height Foot spray [If added, model requires -FRU2]	
🔲 -IGM	In-ground 14" mounting	
🔲 -JFFR1	Jug filler, recessed, freeze resistant, plain end with self-closing valve	
🛄 -PF	Pet fountain receptor [If added, model requires -FRU2]	
🗋 -RCS	Round concrete step for pedestal fountain	

SUGGESTED SPECIFICATIONS

Model GUF99-FRU1 is a pedestal mounted, vandal resistant and freeze resistant round drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by a front mounted push button, by using less than 5 pounds of force, which pneumatically activates a water valve mounted below the frost line. An internally mounted adjustable stream regulator shall control the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall adhere to NSF/ANSI 61, Section 9, Public Law 111-380(NO-LEAD), and CHSC 116875.






MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com





CONTEMPORARY DRINKING FOUNTAINS

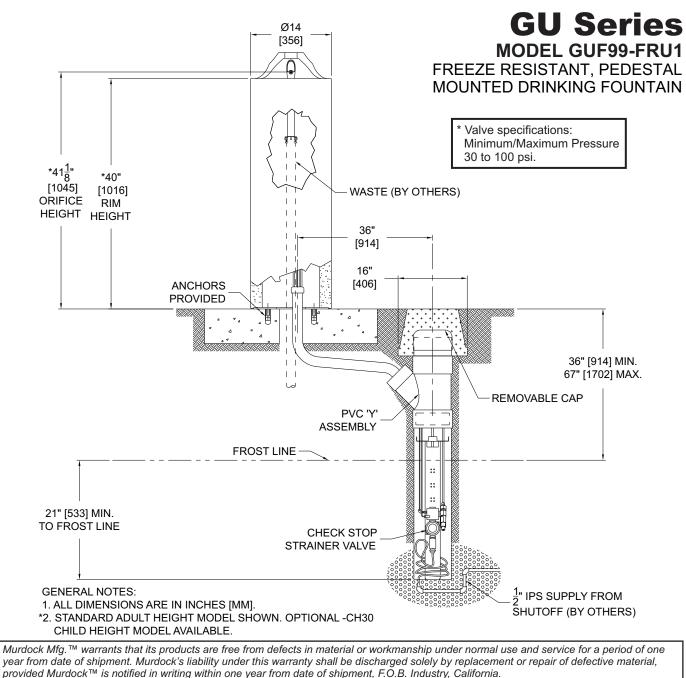

SUMMARY AL FOR TURING	Model Number & Options	Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International [™] . Please visit www.murdockmfg.com for most current specifications.
SELECTION SUMMAR & APPROVAL FOR MANUFACTURING	Contact Signature (Approval for Manufacturing)	Title	

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com